


- Keypad operation
- Vertical body style
- Offset or flat cam
- Code or key management
- Dual functionality - shared or assigned use
- All metal housing with knob pull
- Brushed nickel finish
- Surface mount
- Designed for new or retrofit installations
- Multiple cylinder lengths available
- Visual & audible indicators




- IP55 rated for moisture and dust protection
- Powered by 2 premium lithium CR2450 batteries
- 3-5 year battery life
- Up to 5 year warranty


Top View

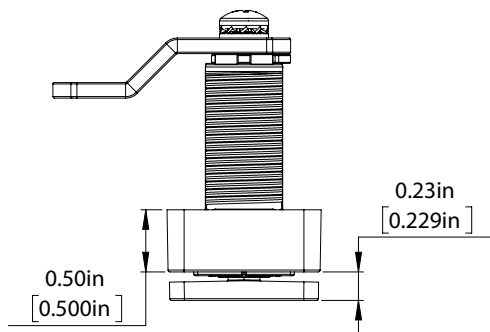


Side View

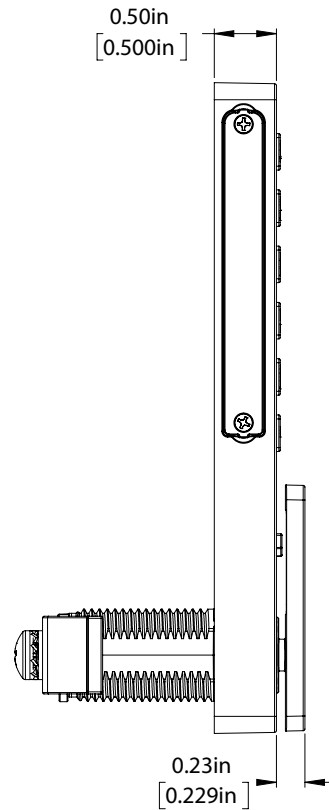

Front View

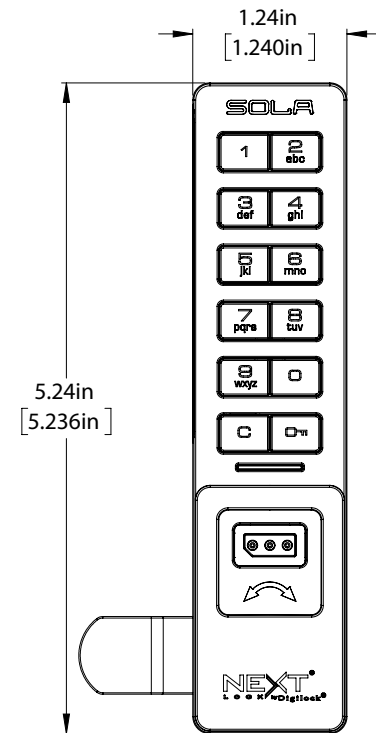


Cylinder Length

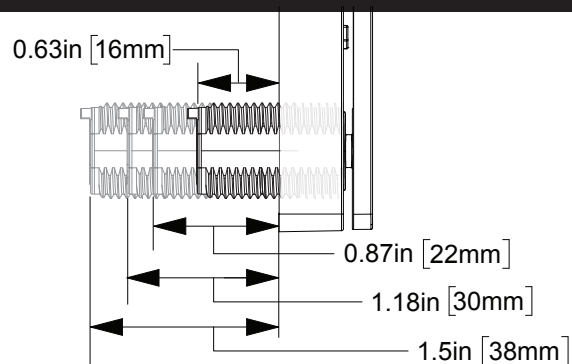


Cam Options

Offset Cam



| | 16MM CYLINDER | 22MM CYLINDER | 30MM CYLINDER | 38MM CYLINDER |
|---|------------------|------------------|------------------|------------------|
| A | 0.35in (8.92mm) | 0.59in (14.92mm) | 0.90in (22.92mm) | 1.22in (30.92mm) |
| B | 0.83in (21.18mm) | 1.07in (27.18mm) | 1.39in (35.18mm) | 1.70in (43.18mm) |

Flat Cam



| | 16MM CYLINDER | 22MM CYLINDER | 30MM CYLINDER | 38MM CYLINDER |
|---|---------------|---------------|---------------|---------------|
| A | 0.71in (18mm) | 0.94in (24mm) | 1.26in (32mm) | 1.57in (40mm) |