

## Keypad Surface Mount - vertical orientation


Versa operates in shared or assigned use functionality to secure workplace furniture in either open or private environments. With multiple configurations, Versa easily adapts to new or retrofit installations.

- Keypad operation
- Cam locking mechanism
- Manage with electronic keys or mobile app
- Dual functionality – shared or assigned use
- Management override and power bypass
- All metal housing
- Brushed nickel or black finish
- Vertical orientation – knob on the bottom or top
- Surface mount
- Designed for new or retrofit installations
- Multiple options for knob style, cam type, and cylinder length
- 90° or 180° knob rotation (clockwise or counter-clockwise)
- Adapts to multiple door thickness
- Visual and audible indicators
- Customizable settings including auto unlock
- Audit trail




- IP55 rated
- ADA compliant models available
- Powered by 2 lithium CR2450 batteries
- 2 year warranty


Top View

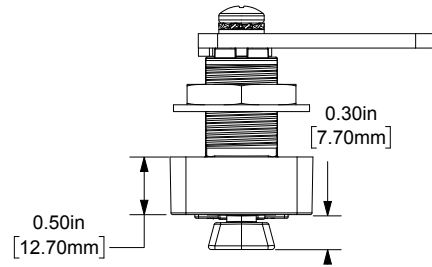


Side View

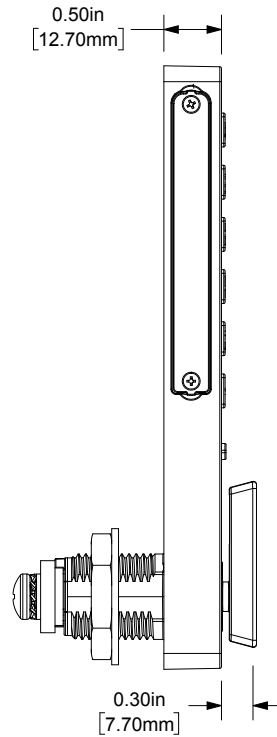

Front View

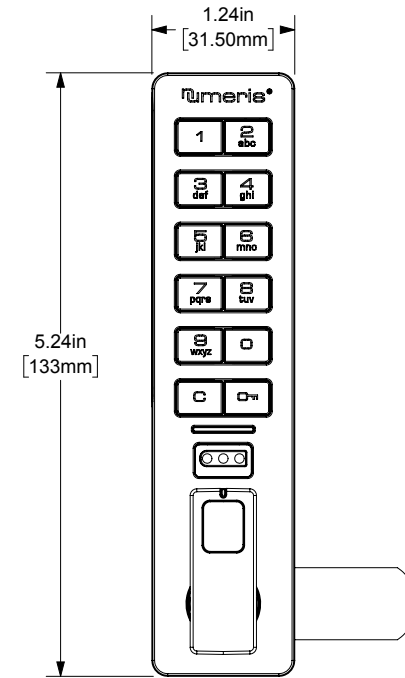


Cylinder Length

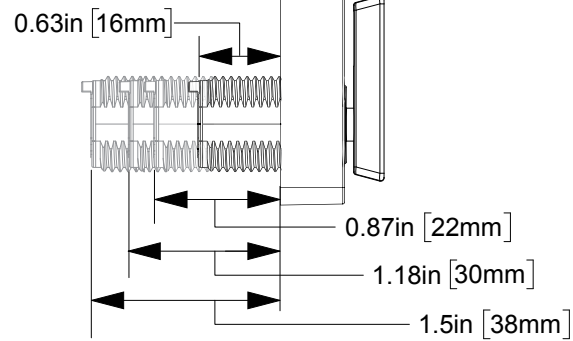


Cam Options

Offset Cam




	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	0.35in (8.92mm)	0.59in (14.92mm)	0.90in (22.92mm)	1.22in (30.92mm)
B	0.83in (21.18mm)	1.07in (27.18mm)	1.39in (35.18mm)	1.70in (43.18mm)

Flat Cam




	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	0.71in (18mm)	0.94in (24mm)	1.26in (32mm)	1.57in (40mm)

Lifter Cam



	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	0.84in (21.25mm)	1.07in (27.25mm)	1.39in (35.25mm)	1.70in (43.25mm)
B	1.07in (27.25mm)	1.31in (33.25mm)	1.62in (41.25mm)	1.94in (49.25mm)
C	1.58in (40.16mm)	1.82in (46.16mm)	2.13in (54.16mm)	2.45in (62.16mm)

Slam Latch



	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	0.78in (19.70mm)	1.01in (25.70mm)	1.33in (33.70mm)	1.64in (41.70mm)

## Keypad Surface Mount - horizontal orientation


Versa operates in shared or assigned use functionality to secure workplace furniture in either open or private environments. With multiple configurations, Versa easily adapts to new or retrofit installations.

- Keypad operation
- Cam locking mechanism
- Manage with electronic keys or mobile app
- Dual functionality – shared or assigned use
- Management override and power bypass
- All metal housing
- Brushed nickel or black finish
- Horizontal orientation – knob on the left or right
- Surface mount
- Designed for new or retrofit installations
- Multiple options for knob style, cam type, and cylinder length
- 90° or 180° knob rotation (clockwise or counter-clockwise)
- Adapts to multiple door thickness
- Visual and audible indicators
- Customizable settings including auto unlock
- Audit trail




- IP55 rated
- ADA compliant models available
- Powered by 2 lithium CR2450 batteries
- 2 year warranty


## Side View

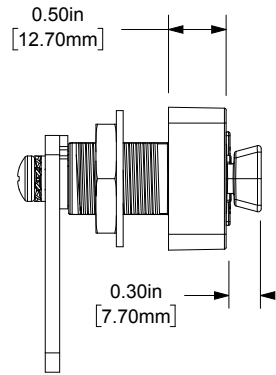


## Top View

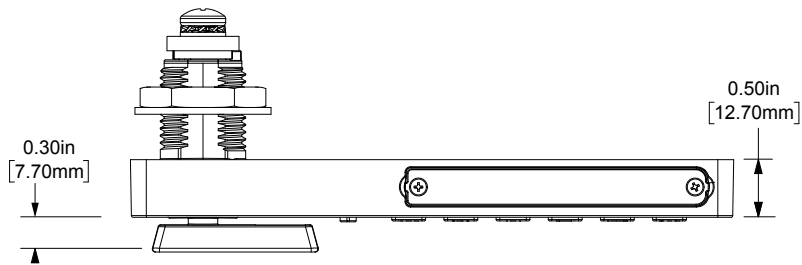

## Cylinder Length

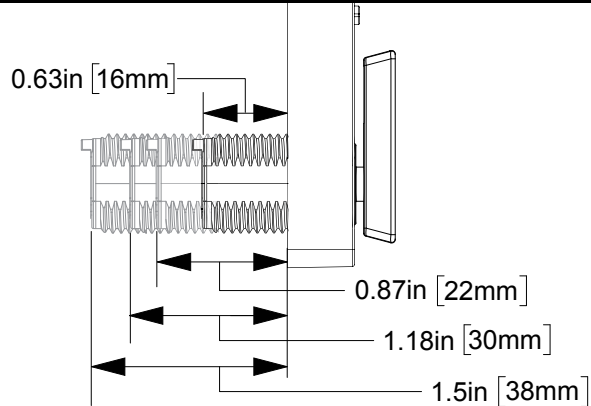


## Front View

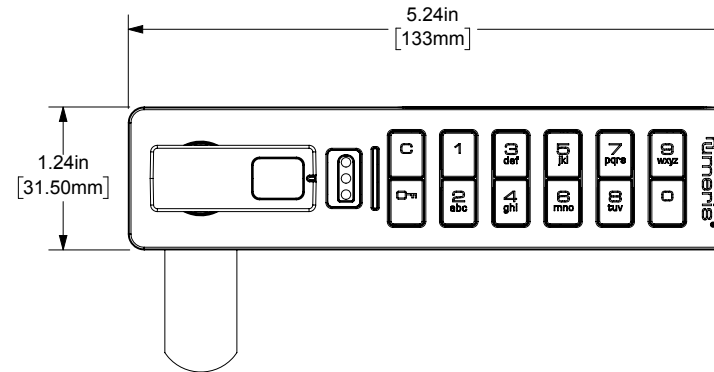


## Cam Options

### Offset Cam




	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	0.35in (8.92mm)	0.59in (14.92mm)	0.90in (22.92mm)	1.22in (30.92mm)
B	0.83in (21.18mm)	1.07in (27.18mm)	1.39in (35.18mm)	1.70in (43.18mm)

### Flat Cam




	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	0.71in (18mm)	0.94in (24mm)	1.26in (32mm)	1.57in (40mm)

### Lifter Cam



	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	0.84in (21.25mm)	1.07in (27.25mm)	1.39in (35.25mm)	1.70in (43.25mm)
B	1.07in (27.25mm)	1.31in (33.25mm)	1.62in (41.25mm)	1.94in (49.25mm)
C	1.58in (40.16mm)	1.82in (46.16mm)	2.13in (54.16mm)	2.45in (62.16mm)

### Slam Latch



	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	0.78in (19.70mm)	1.01in (25.70mm)	1.33in (33.70mm)	1.64in (41.70mm)

## Keypad Recess Mount - vertical orientation


Versa operates in shared or assigned use functionality to secure workplace furniture in either open or private environments. With multiple configurations, Versa easily adapts to new or retrofit installations.

- Keypad operation
- Cam locking mechanism
- Manage with electronic keys or mobile app
- Dual functionality – shared or assigned use
- Management override and power bypass
- All metal housing
- Brushed nickel or black finish
- Vertical orientation – knob on the bottom or top
- Recess mount
- Multiple options for knob style, cam type, and cylinder length
- 90° or 180° knob rotation (clockwise or counter-clockwise)
- Adapts to multiple door thickness
- Visual and audible indicators
- Customizable settings including auto unlock
- Audit trail




- IP55 rated
- ADA compliant models available
- Powered by 4 premium AAA batteries
- 2 year warranty


## Top View

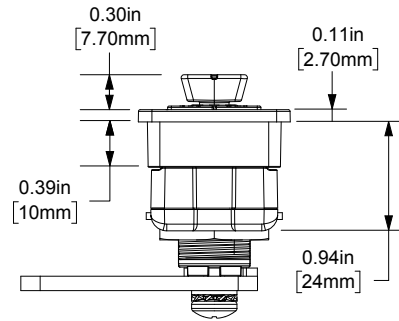


## Side View

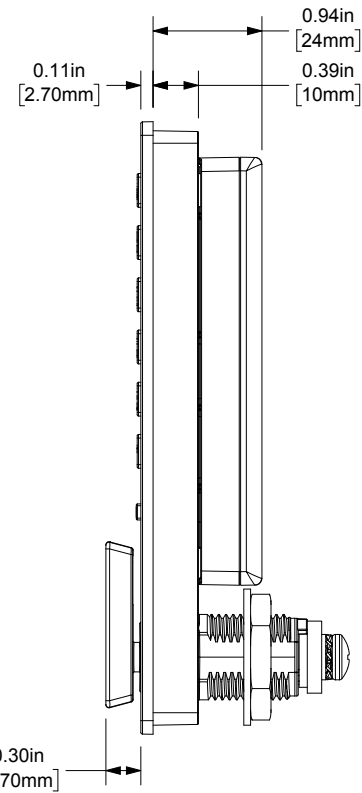

## Front View

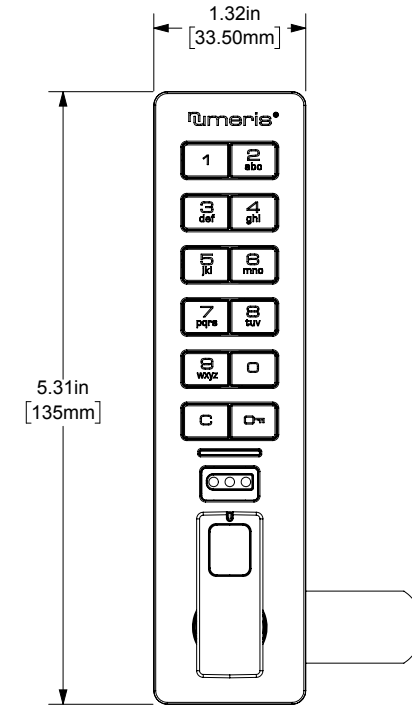


## Cylinder Length

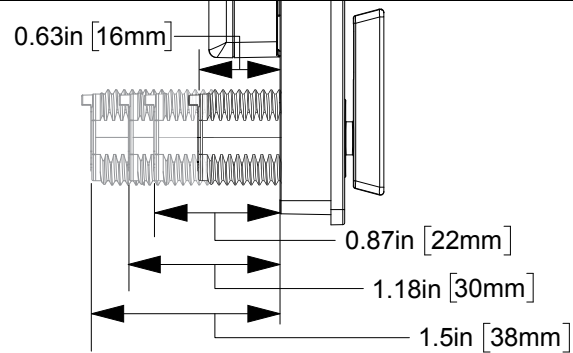


## Cam Options

### Offset Cam




	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	0.74in (18.92mm)	0.98in (24.92mm)	1.30in (32.92mm)	1.61in (40.92mm)
B	1.23in (31.18mm)	1.46in (37.18mm)	1.78in (45.18mm)	2.09in (53.18mm)

### Flat Cam




	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	1.10in (28mm)	1.34in (34mm)	1.65in (42mm)	1.97in (50mm)

### Lifter Cam



	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	1.23in (31.25mm)	1.47in (37.25mm)	1.78in (45.25mm)	2.10in (53.25mm)
B	1.47in (37.25mm)	1.70in (43.25mm)	2.02in (51.25mm)	2.33in (59.25mm)
C	1.97in (50.16mm)	2.20in (56.16mm)	2.53in (64.16mm)	2.84in (72.16mm)

### Slam Latch



	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	1.16in (29.5mm)	1.4in (35.5mm)	1.71in (43.5mm)	2.03in (51.5mm)



## Keypad Recess Mount - horizontal orientation


Versa operates in shared or assigned use functionality to secure workplace furniture in either open or private environments. With multiple configurations, Versa easily adapts to new or retrofit installations.

- Keypad operation
- Cam locking mechanism
- Manage with electronic keys or mobile app
- Dual functionality – shared or assigned use
- Management override and power bypass
- All metal housing
- Brushed nickel or black finish
- Horizontal orientation – knob on the left or right
- Recess mount
- Multiple options for knob style, cam type, and cylinder length
- 90° or 180° knob rotation (clockwise or counter-clockwise)
- Adapts to multiple door thickness
- Visual and audible indicators
- Customizable settings including auto unlock
- Audit trail




- IP55 rated
- ADA compliant models available
- Powered by 4 premium AAA batteries
- 2 year warranty


## Side View

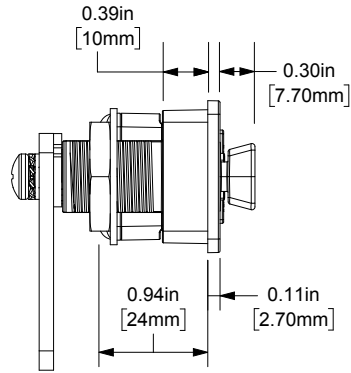


## Top View

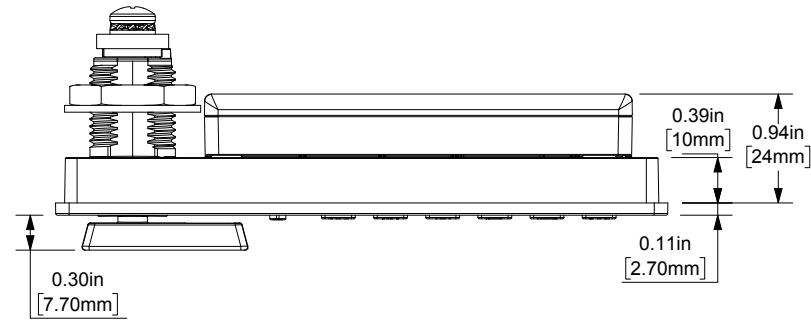

## Cylinder Length

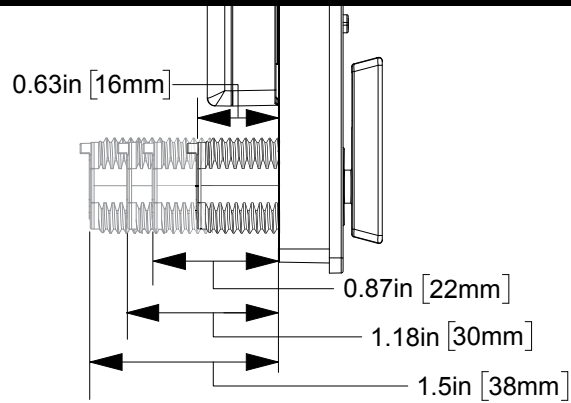


## Front View

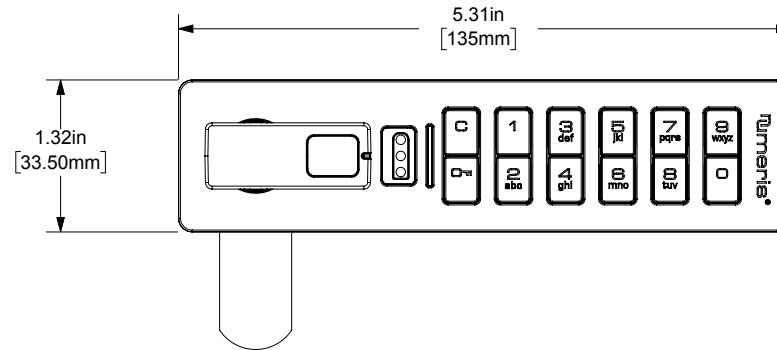


## Cam Options

### Offset Cam




	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	0.74in (18.92mm)	0.98in (24.92mm)	1.30in (32.92mm)	1.61in (40.92mm)
B	1.23in (31.18mm)	1.46in (37.18mm)	1.78in (45.18mm)	2.09in (53.18mm)

### Flat Cam




	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	1.10in (28mm)	1.34in (34mm)	1.65in (42mm)	1.97in (50mm)

### Lifter Cam



	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	1.23in (31.25mm)	1.47in (37.25mm)	1.78in (45.25mm)	2.10in (53.25mm)
B	1.47in (37.25mm)	1.70in (43.25mm)	2.02in (51.25mm)	2.33in (59.25mm)
C	1.97in (50.16mm)	2.20in (56.16mm)	2.53in (64.16mm)	2.84in (72.16mm)

### Slam Latch



	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	1.16in (29.5mm)	1.4in (35.5mm)	1.71in (43.5mm)	2.03in (51.5mm)